# How to Reset Password on SADP

# Tool:

Please follow the link


https://www.hikvision.com/en/support/tools/destop-tools/sadp-for-windows/ to

download the latest version of SADP on your computer.

**NOTE:** The Hikvision device and the computer which installed SADP should be in the same subnet.

Open SADP Tool to search online devices. Select the device and click Forget

#### Password:

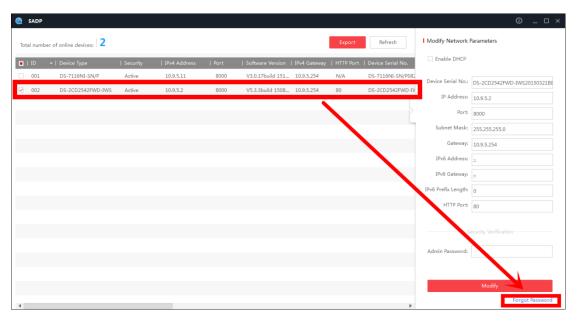

You might see one of the three pop-ups.

**1**. If the pop-up requires a security code, please turn to **method 1**.

Restore Default Password		×
Restore Default F	Password	
Security Code:		
	Confirm	ncel

. If the pop-up requires encrypted file, please turn to **method 2**.

t Passi	word
1	Step 1: Click Export to download the key request file (XML file) or take a photo of the QR code. Send the XML file or QR code photo to our technical engineers.
2	Export Step 2: Input the key or import the key file received from the technical engineer to reset the password
	for the device.  Import File
	New Password:
	Confirm Password:

. If the pop-up requires encrypted file or key, please turn to **method 2 or 3**.

Reset Password	
<ul> <li>Step 1: Click Export to download the key request file (XML file) or take a photo of the QR code. Send the XML file or QR code photo to our technical engineers.</li> <li>Export</li> </ul>	
<ul> <li>Step 2: Input the key or import the key file received from the technical engineer to reset the password for the device.</li> <li>Input Key Import File</li> </ul>	
New Password:	
Confirm Password:	
Reset Network Cameras' Passwords	
Co	nfirm Cancel

#### Method 1, Device Information

Copy **Start Time** and **Device Serial No.**, then send the information to Hikvision technical support team, support team would send back security codes.


SADP										① _ □
Total number of online devices: 3					Export Refresh I Modify Network Parameters		Parameters			
rsion	Start Time	∿6 Address	IPv6 GateWay	IPv6 Prefix Length	Support IPv6	IPv6 Modifiable	Support DHCP	IPv4 DHCP	Enable DHCP	
	2015-12-02 15:52:15				-		ale of		Device Serial No.:	DS-6601HFHI/L0120151120CCWR
	2015-11-27 10:36:47			64	Ves Ves	Yes	Yes Yes	OFF	IP Address:	10.9.5.11
110 1411	2010-11-17 20:00:12	10001240710011			103	140	10.0		Port:	8000
									Subnet Mask:	255.255.255.0
									Gateway:	10.9.5.254
									IPv6 Address:	1.00.1.57.L.11.1.01.1.41

Note: Please reboot the device to check the Start Time.

After receiving security codes, please choose one code according to **device's current time**.


```
2015-11-27:RRrezeSezz
2015-11-28:RzzSRrRyzd
2015-11-29:zQeqz9yee
2015-11-30:qQRzed9ezR
2015-12-01:qe9ryzRQdy
```

Input security code then click **Confirm**.

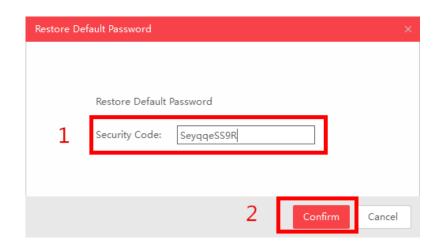


### Method 2, XML File

Click **Export button** to save xml file, then send the XML file to Hikvision technical support team.

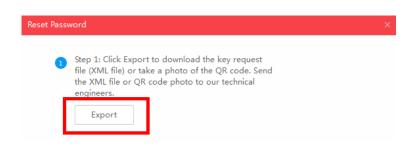

Hikvision technical support team will send the encrypted file back. Choose the path of the encrypted file, input your new password and confirm, click **Confirm** to reset password.

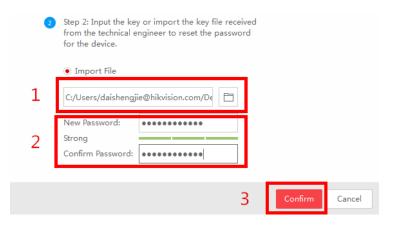

Note: The encrypted file would be valid for 48 hours.

## Method 3, QR CODE

With this method you can export the XML file or take a screenshot of QR code.

If you export the XML file, please refer to method 2 to reset password.

You can also send the screenshot of QR code to Hikvision technical support team.



Hikvision technical support team will send back the key consists of numbers and letters (8 bytes).

Input the key, type in the new password and confirm. Click **Confirm** to reset password.

2	Step 2: Input the key or import the key file received from the technical engineer to reset the password for the device.								
	● Input Key O Import File								
1	5b449116								
2	New Password: Strong Confirm Password:	•••••							
note	🗹 Reset Network C	ameras' Passwords							
			3	Confirm	Cancel				

Note: If you want to reset the password of NVR and connected cameras simultaneously, please choose "Reset Network Cameras' Passwords" option.

First Choice for Security Professionals *HIKVISION* Technical Support